



ATLAS[®]-CR FOREST

CONSTRUCTION

Interior lining:


Special white polyurethane lining. Minimal flow loss thanks to its smooth walls.

Exterior fabric:

Circular weaved outer layer made from high tenacity polyester thread. Lighter flat fabric. No defects (broken threads, knots, etc.)

Exterior covering:

Transparent PU-based emulsion.

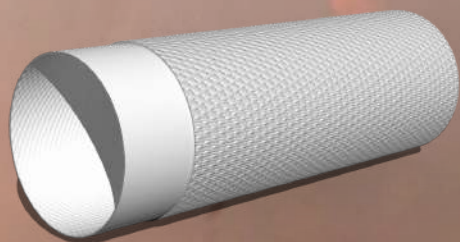

PERFORMANCE

- Extra light and flexible hose even at low temperatures (-15°C).
- Easy to handle and roll up.
- Highly resistant to the flow of chemicals thanks to the interior lining's special composition.
- Resistant to pressure thanks to its circular weave construction.
- Highly resistant to ozone thanks to its outer coating that also improves abrasion.
- Available with various international certifications.

USES

- Ideal for forestry use.

TECHNICAL CHARACTERISTICS

DIAMETER		WEI	WORKING	TEST	BREAKAGE
inches	mm.	ght	PRESSURE	PRESSURE	PRESSURE
		gr/m.	Bars	Bars	Bars
1"	25	120	25	50	>75
1½"	38	170	25	50	>75