


# FLEXIGOM<sup>®</sup> PU ANTIESTATIC

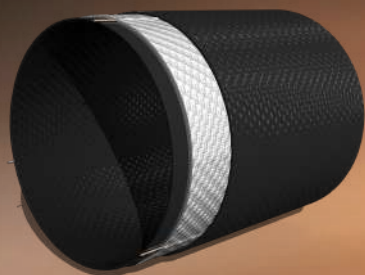

## CONSTRUCTION

### Interior and exterior layer:

Extruded thermoplastic polyurethane. Minimal flow loss thanks to its smooth interior wall. Black. Shiny surface without grooves.

### Reinforced middle textile:

Circular weaved outer layer made from high tenacity polyester thread. No defects (broken threads, knots, etc.).

Contains 3 copper threads to make it antistatic.

## PERFORMANCE

- Flexible and highly-resistant hose.
- Flexible despite its antistatic properties.

## USES

- Cleaning of tanks with flammable products.
- Transfer of liquids with risk of explosion.
- Unloading flammable chemicals.

## TECHNICAL CHARACTERISTICS

| DIAMETER |     | COLOR | BREAKAGE PRESSURE | WORKING PRESSURE | WEIGHT | THICKNESS |      | TRACTION |       |
|----------|-----|-------|-------------------|------------------|--------|-----------|------|----------|-------|
| inches   | mm. |       | bars              | bars             |        | inches    | mm.  | Lbs      | Kg    |
| 2"       | 51  | BLACK | 70                | 21               | 0,52   | 0,10      | 2,60 | 13448    | 6100  |
| 3"       | 76  | BLACK | 48                | 16               | 0,78   | 0,11      | 2,80 | 19180    | 8700  |
| 4"       | 102 | BLACK | 52                | 17,5             | 1,04   | 0,11      | 2,79 | 27000    | 12150 |
| 5"       | 127 | BLACK | 42                | 14               | 1,41   | 0,12      | 3,05 | 35000    | 15750 |
| 6"       | 153 | BLACK | 42                | 14               | 1,71   | 0,12      | 3,05 | 38000    | 17100 |
| 8"       | 203 | BLACK | 42                | 14               | 2,97   | 0,15      | 3,81 | 80000    | 36000 |
| 10"      | 254 | BLACK | 42                | 14               | 4,30   | 0,16      | 4,06 | 110000   | 49500 |